
TopLevel MF 4 Rapid Setting Feather Finish



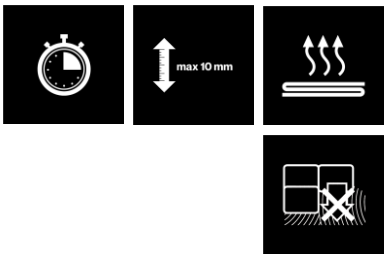

> for quick renovation and repair work
> preformed
> excellent adhesion
> can be used without undercoat

Product description

Powdery, highly synthetic resin-modified, stable, quick drying, preformed, hydraulically setting repair compound. Can be processed on most substrates, also without undercoat, and can be drawn level.
Only indoors, on floor and wall surfaces. For the improvement of the most diverse of substrates, filling holes and unevenness in cement and AFE screeds and concrete surfaces, as well as smoothing chipboard. For partial levelling of old and new filling layers. Can be used in surface fillings in layer thicknesses from 0 - 10 mm. Suitable for underfloor heating systems and castor wheel loads.

Delivery format

Container	Outer packaging	Pallet
6 KG / KE	-	85 KE

Storage
Can be stored frost-free, cool, and dry on wooden shelves in the unopened original container for 365 days

Processing

Recommended tools
Slow-rotating electric agitator, suitable mixing vessel, trowel, smoothing trowel, spatula.

Mixing
Take a clean mixing vessel and add this product to water using a slow-rotating mixer until a homogeneous and lump-free blend is obtained.

Processing
Pour the fresh smoothing compound onto the substrate in one work step, if possible, up to the desired layer thickness and distribute evenly. Note: Only mix as much mortar as can be processed within a pot life of approx. 5 mins!

Murexin GmbH: A-2700 Wiener Neustadt, Franz von Furtenbach Straße 1
Tel.: +43(0)2622 / 27 401 - 0, Fax: +43(0)2622 / 27 401 DW 187
E-Mail: info@murexin.com, www.murexin.com

Technical data

Chemical base	Rapid-setting cement
Consumption	1.5 kg/m² per mm layer thickness
Water consumption	approx. 1.8 l per unit (corresponding to approx. 0.3 l per kg)
Layer thickness	max. 10 mm
Ready for laying	30 - 45 min.
Processing time	5 min.
Can be walked on	20 - 30 min.
Bending tensile strength	F10
Compressive strength	C40
Processing temperature	(optimum) +15 °C to +25 °C

Test certificates

Tested in accordance with (standard, classification ...)
EN 13813: CT C40 F10
Brandverhalten A1 nach EN 13501

Substrate

Suitable substrates
Standard mineral substrates
Cement screeds and concrete floors
Dry screed elements based on cement

The substrate must be dry, free of frost, solid, load-bearing, dimensionally stable and free of dust, dirt, oil, grease, solvents and loose parts and correspond to the applicable technical national and European guidelines, standards as well as meet the "generally accepted rules of the trade".

Priming:
On absorbent substrates:
MurePrime LF 1 (undiluted), MurePrime DX 9 or MurePrime D 1 (mixing from 1:1 to 1:3 with water)
On non-absorbent substrates:
MurePrime D 4 Rapid or MurePrime DX 9 (undiluted)

Product and processing instructions

Material information:
- When working outside the ideal temperature and/or humidity range, the material properties may change significantly.
- Temper materials accordingly before processing!
- To retain the product properties, no foreign materials may be mixed in!
- Water dosing amounts or thinning specifications must be precisely kept!
- Check coloured products before use for colour accuracy!
- Colour consistency can only be guaranteed within the same batch.
- Colouration is significantly affected by environmental conditions.
- Mixed material that has already started to stiffen may not be diluted further and replaced with fresh material!

Environmental advice:
- Do not process at temperatures below +15 °C!

Murexin GmbH: A-2700 Wiener Neustadt, Franz von Furtenbach Straße 1
Tel.: +43(0)2622 / 27 401 - 0, Fax: +43(0)2622 / 27 401 DW 187
E-Mail: info@murexin.com, www.murexin.com

- The ideal temperature range for material, substrate and air is +15 °C to +25 °C.
- The ideal air humidity range is between 40% to 60%.
- Increased humidity and/or lower temperatures delay, lower air humidity and/or higher temperatures accelerate drying, setting and hardening.
- Ensure sufficient ventilation during the drying, reaction, and hardening phase; avoid draughts!
- Protect from direct sunlight, wind and weather!
- Protect adjacent components!

Tips:
- We recommend using a test surface first or a small area for initial, small-scale testing.
- Observe the product data sheets of all MUREXIN products used in the system.
- Keep a genuine original container of the respective batch for later repair work.
- For heated screeds, a standard heating procedure must take place before laying.
- The underfloor heating system may not be switched on during the processing and hardening.

The information provided reflects average values that were obtained under laboratory conditions. Due to the use of natural raw materials, the indicated values of individual deliveries may vary slightly without impacting the product suitability.

Safety instructions

This leaflet is based on extensive experience, is intended to convey the best of our knowledge, is not legally binding and does neither constitute a contractual legal relationship nor a subsidiary obligation resulting from the bill of sale. The quality of our materials is guaranteed within the framework of our general terms and conditions. Our products may be used by professionals and/or experienced and accordingly technically skilled persons only. Users are not released from inquiring in case of uncertainties or from rendering professional workmanship. We recommend using a test surface first or a small area for initial, small-scale testing. Naturally, it is not possible to describe or foresee all possible current and future uses and peculiarities. Information that is assumed to be familiar to experts has been omitted.
Please observe the current, technical, national and European standards, guidelines and data sheets regarding materials, substrates and the subsequent construction. Please contact us if you have any reservations or doubt.
This version is rendered invalid if a new version is released. The most recent data sheets, safety data sheets and the terms and conditions are available online at www.murexin.com.

Murexin GmbH: A-2700 Wiener Neustadt, Franz von Furtenbach Straße 1
Tel.: +43(0)2622 / 27 401 - 0, Fax: +43(0)2622 / 27 401 DW 187
E-Mail: info@murexin.com, www.murexin.com